



FDAI92-Ex / FDAI93-Ex

Alarm indicators

For explosion-hazard areas for zones 1 and 2

- **FDAI92-Ex**
 - Modern flat design
 - Non-screw terminals
- **FDAI93-Ex**
 - Simple plug-in, expanding-spring socket

AlgoRex
Synova™
Sinteso™
Cerberus® PRO




Characteristics

- Alarm indicators are connected to automatic fire detectors in order to indicate quickly the source of an alarm signal from detectors which are not easily accessible or visible.
- The alarm indicators contain an indicator lamp unit with two integrated LEDs. They light up as soon as the connected fire detector gives an alarm.
- Only **one** external alarm indicator may be connected to each detector.


Alarm indicators FDAI92-Ex

- Alarm indicator is mounted with two screws either directly or on a wall.
- For the following applications the FDAI92-Ex can be completed with AI330 adapter frame:
 - for surface laid conduit or ducts
 - to increase the loop space
 - as an adapter for different makes of box

Dimensions

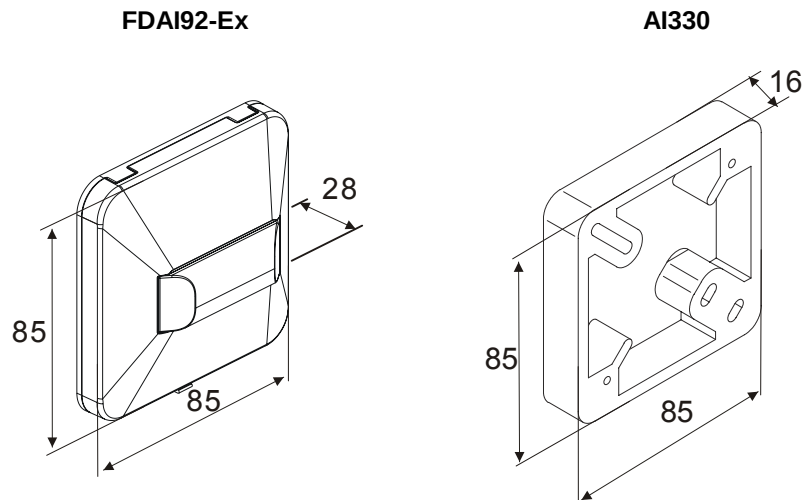

- Made of transparent plastic, the FDAI93-Ex alarm indicator is suitable for installation in door frames, switching panels, ceiling voids or special housings. The 22.5 mm Ø mounting hole is drilled by the system owner. The holder must be fitted with an insulating cap for safety.
- For installation in humid rooms the DJZ1193 and DCA1191 housings as well as a washer are available.
- The housing DJZ1193 has a hole for the mounting of one alarm indicator.
- Up to 4 alarm indicators can be built into the housing DCA1191. The 22.5 mm Ø mounting holes are drilled by the system owner.

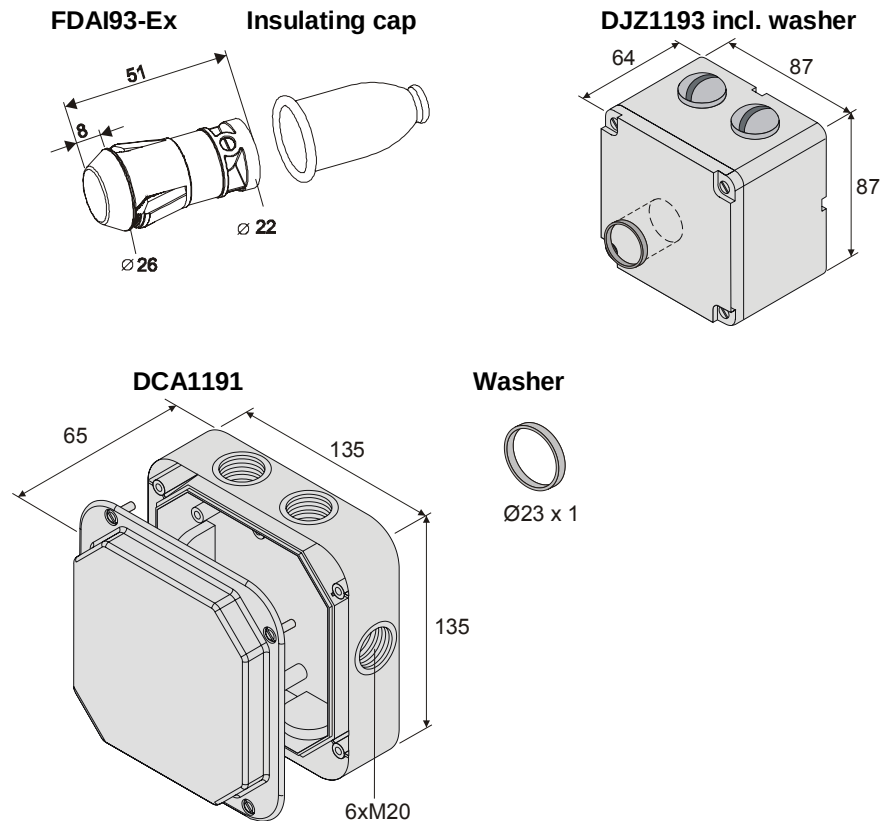

Technical data

	FDAI92-Ex	FDAI93-Ex
Operating voltage	4... 5 VDC	1.5 VDC
Operating current (continuous)	max. 35 mA	max. 20... 30 mA
Connection terminals	max. 1.5 mm ²	max. 1.5 mm ²
Ambient temperature	-25... +80 °C	-25... +80 °C
Humidity	≤95 % rel.	≤95 % rel.
Protection category EN60529 / IEC529	IP40	
– with DJZ1193	–	IP55
– with DCA1191	–	IP56
Color	white, ~RAL 9010	transparent plastic
– housing DJZ1193		white, ~RAL 9010
– housing DCA1191		white, ~RAL 9010
Ex classification	Ex ib IIC T6 (Ta ≤ 55 °C)	Ex ib IIC T6 (Ta ≤ 55 °C)
'simple apparatus' acc. to EN50020 § 5.4	Ex ib IIC T5 (Ta ≤ 70 °C)	Ex ib IIC T5 (Ta ≤ 70 °C)
Approvals	EECS, ESTI	EECS, ESTI, PTB
DNV GL (Marine)	MEDB00003UU	-
QS Standards	Fire protection industry certified quality assurance system according to EN ISO 9001:2000	

09 	FDAI92-Ex	Siemens Schweiz AG; Theilerstrasse 1a CH-6300 Zug Technical data: see doc. A6V10260486
FDAI92-Ex - Alarm indicator for use in fire detection and fire alarm systems installed in buildings.		
2014/30/EU (EMC): EN 50130-4 / EN 61000-6-3 ; 2011/65/EU (RoHS): 50581		
The declared conformity can be seen in the EU Declaration of Conformity (DoC), which is obtainable via the Customer Support Center: Tel. +49 89 9221-8000 or https://siemens.com/bt/download		
DoC No.: CED-FDAI92-Ex		
09 	FDAI93-Ex	Siemens Schweiz AG; Theilerstrasse 1a CH-6300 Zug Technical data: see doc. A6V10260486
FDAI93-Ex - Alarm indicator for use in fire detection and fire alarm systems installed in buildings.		
2014/30/EU (EMC): EN 50130-4 / EN 61000-6-3 ; 2011/65/EU (RoHS)		
The declared conformity can be seen in the EU Declaration of Conformity (DoC), which is obtainable via the Customer Support Center: Tel. +49 89 9221-8000 or https://siemens.com/bt/download		
DoC No.: CED-FDAI93-Ex		

Details for ordering

	Type	Part no	Designation	Weight
Accessory	FDAI92-Ex	S54370-F3-A1	Alarm indicator, surface version	0.050 kg
	AI330	BPZ:3169430001	Adapter frame	0.020 kg
Spare part Accessories	FDAI93-Ex	S54370-F6-A1	Alarm indicator incl. insulating cap, flush version	0.010 kg
	–	BPZ:3048160001	Insulating cap	0.005 kg
	DJZ1193	BPZ:5302950001	Indicator housing, incl. washer	0.115 kg
	DCA1191	BPZ:4588560001	Housing with cover	0.265 kg
	–	BPZ:2473130001	Washer	0.001 kg

Issued by
Siemens Switzerland Ltd
Building Technologies Division
International Headquarters
Theilerstrasse 1a
CH-6300 Zug
Tel. +41 58 724 24 24
www.siemens.com/buildingtechnologies

© Siemens Switzerland Ltd, 2015
Technical specifications and availability subject to change without notice.