

4-Port 10/100TX 802.3af/at PoE + 2-Port 10/100TX Desktop Switch



Centralized Power Distribution for HD IP Surveillance System

PLANET FSD-604HP Desktop Switch provides four 802.3at PoE+ ports for catering to small-scale IP surveillance networks at a lower total cost. With dual 10/100BASE-TX uplink ports, the recorded HD video files from the 4 PoE IP cameras powered by the FSD-604HP are saved in the 4-channel NVR system. Its surveillance software performs comprehensive security monitoring and manages the surveillance system in the local LAN or remote site via Internet.



The FSD-604HP's advanced features are as follows:

- 4-port PoE, 60-watt PoE budget
- Two 10/100Mbps uplink ports
- Can extend distance of up to 250m in the extend mode
- 30-watt power output at speed of 10Mbps
- Internal AC power, fanless design

RJ45 Interface

- 6 10/100Mbps Fast Ethernet ports
- 4 ports supporting 52V DC power to PoE powered device

Power over Ethernet


- Complies with IEEE 802.3af/at Power over Ethernet end-span
- Up to 4 IEEE 802.3af/2 IEEE 802.3at devices powered
- Supports PoE power up to 30 watts for each PoE port
- 60-watt PoE budget
- Hardware DIP switch for "Standard" and "Extend" mode selection; the "Extend" mode features 30-watt PoE transmit distance of 250m at speed of 10Mbps and VLAN isolation
- Auto detects powered device (PD)
- Circuit protection prevents power interference between ports
- Remote power feeding up to 100m in the standard mode

Switching

- Hardware-based 10/100Mbps auto-negotiation and auto MDI/MDI-X
- Flow control for full duplex operation and back pressure for half duplex operation
- 1536bytes packet size
- Integrates address look-up engine, supporting 2K absolute MAC addresses
- Automatic address learning and address aging
- Solid DIP switch to isolate ports to prevent broadcast storm and defend DHCP spoofing

Hardware

- Desktop palm size
- LED indicators for PoE ready/activity and LINK/ACT
- Supports contact discharge of $\pm 4\text{KV}$ DC and air discharge of $\pm 6\text{KV}$ DC for Ethernet ESD protection
- Supports $\pm 4\text{KV}$ surge immunity
- Internal AC power supply

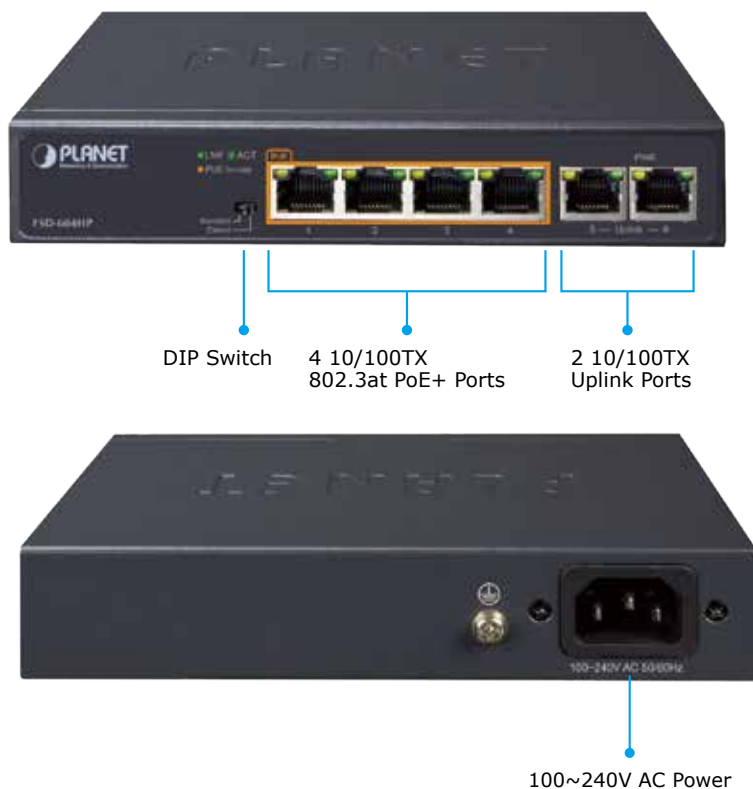


Two 10/100Mbps Uplink Ports

The FSD-604HP comes with two uplink ports with 100Mbps transfer rate to ensure high-speed data and video transmission, reliable assurance for connection between the surveillance system and outdoor network where the four PoE+ ports can be used to their full potential.


Innovative Port-based VLAN Protection

The FSD-604HP features “Port-based VLAN Protection” where ports can be isolated from each other via one DIP switch. This can help to prevent the IP camera’s multicast or broadcast storm from influencing each other.

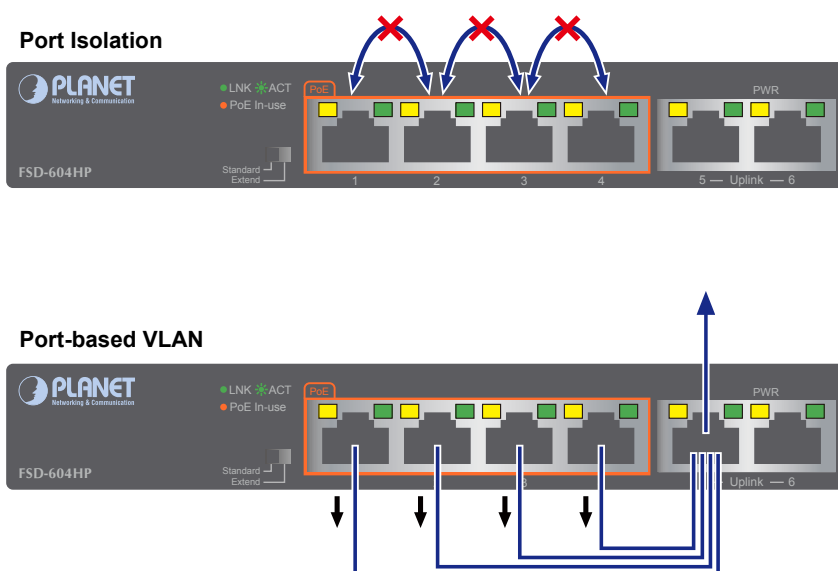

Distance Extended for Transmission of Power and Data

The built-in solid DIP switch provides “Standard” and “Extend” operation modes. The FSD-604HP operates as a normal IEEE 802.3at/af PoE Switch in the “Standard” operation mode. In the “Extend” operation mode, the FSD-604HP operates on a per-port basis in 10Mbps duplex mode but can support 30-watt PoE power output over a distance of up to 250 meters overcoming the 100m limit on Ethernet UTP cable. With this brand-new feature, the FSD-604HP provides an additional solution for 802.3at/af PoE distance extension, thus saving the cost of Ethernet cable installation.

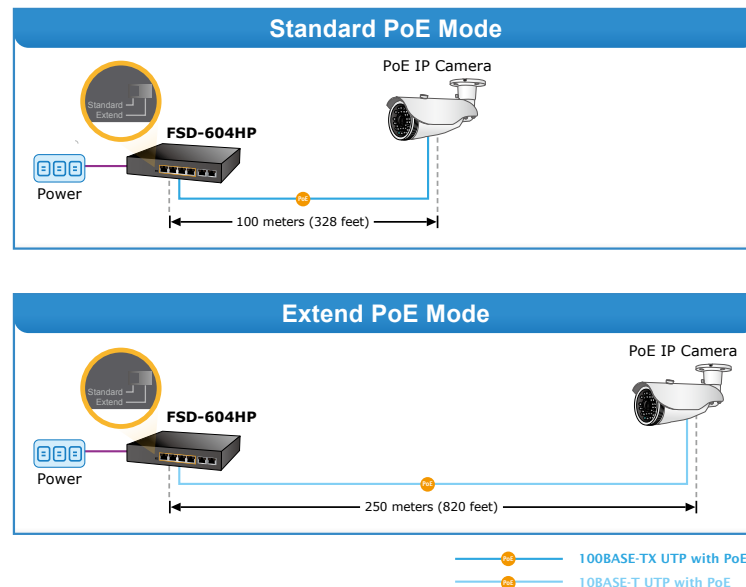

Robust Protection


The FSD-604HP provides contact discharge of $\pm 4\text{KV}$ DC and air discharge of $\pm 6\text{KV}$ DC for Ethernet ESD protection. It also supports $\pm 4\text{KV}$ surge immunity to improve product stability and protects users' networks from devastating ESD attacks, making sure the flow of operation does not fluctuate.

Environment-friendly, Fanless Design for Silent Operation

The FSD-604HP comes with a desktop-sized, compact metal housing, making the placement of the unit convenient. It features a ventilated construction in which a cooling fan is not necessary, thereby making its operation noiseless. Moreover, the FSD-604HP is able to operate reliably and stably in any environment without affecting its performance. The deployment of PoE PDs with constant power feeding can be easily and quickly done.

Easy Cable Connection


With data switching and Power over Ethernet integrated into one unit, the FSD-604HP reduces cabling requirements and eliminates the need for electrical outlets on the wall, ceiling or any unreachable place. A wire that carries both data and power can lower the installation costs, simplify the installation effort and eliminate the need for electricians or extension cords. With 4 PoE interfaces, the FSD-604HP is ideal for small businesses and workgroups making the deployment of the PoE facility including wireless access points, IP-based surveillance camera and IP phones and door phone in any places easier, more efficient and more cost-effective.

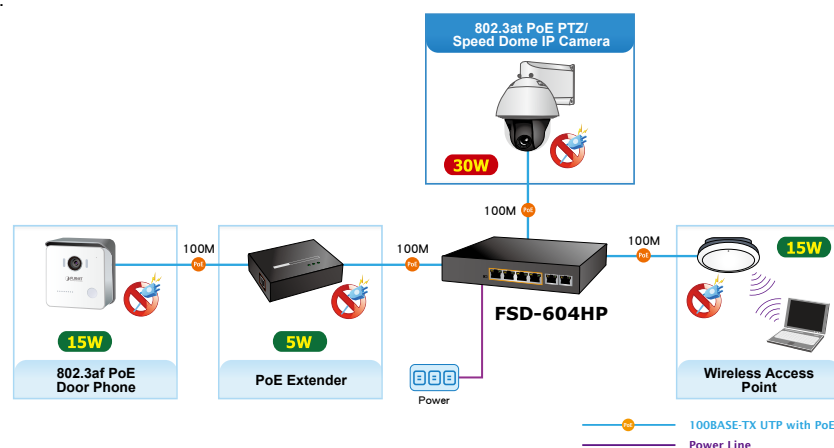

Applications


SOHO and Home-use Fast Ethernet PoE Network Deployment

With its expanded home-use feature, the FSD-604HP 802.3at/af PoE Switch helps SOHO and home users to create an integrated data, video, and powered network. The wireless AP and PoE IP camera and PoE door phone devices work perfectly with the FSD-604HP, which injects power through the Ethernet cables, thus helping SOHO and home users to build a cost-effective and reliable PoE network environment easily.

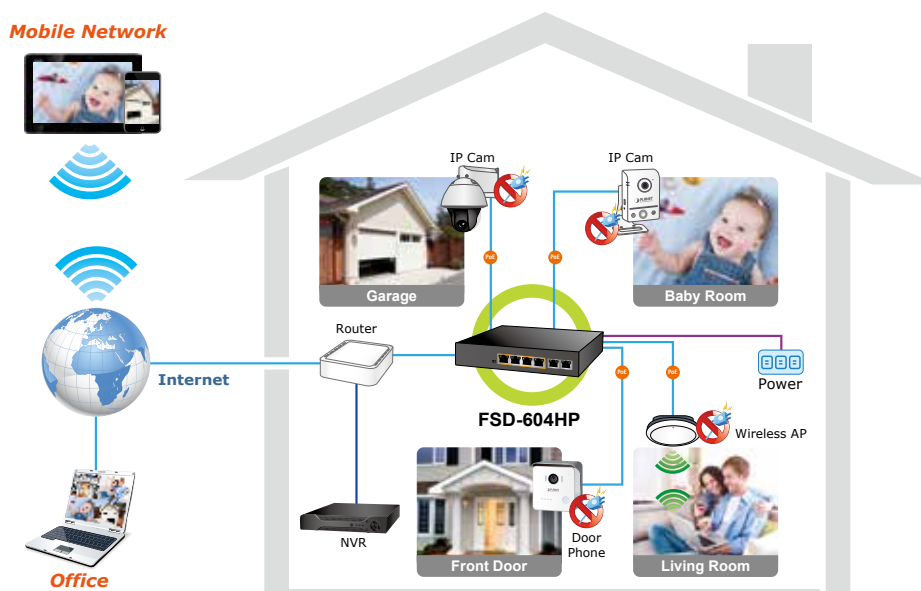

Perfectly-integrated Solution for PoE IP Camera and NVR System

The FSD-604HP provides four 802.3at/af PoE ports for catering to small-scale home and SOHO IP surveillance networks at a lower total cost. The FSD-604HP comes with a high-performance switch architecture and 60-watt PoE power budget. The recorded video files from the 4 PoE IP cameras powered by the FSD-604HP are saved in the 4-channel NVR system. Besides, surveillance software can be used to perform comprehensive security monitoring. For instance, one FSD-604HP can be combined with one 4-channel NVR; that is, each of its PoE port can be linked to a specific 802.3af PoE IP camera for the administrators to centrally and efficiently manage the surveillance system in one site. The FSD-604HP's Fast Ethernet TP interface also provides Fast Ethernet TP connection for uplink to NVR systems or public server groups.

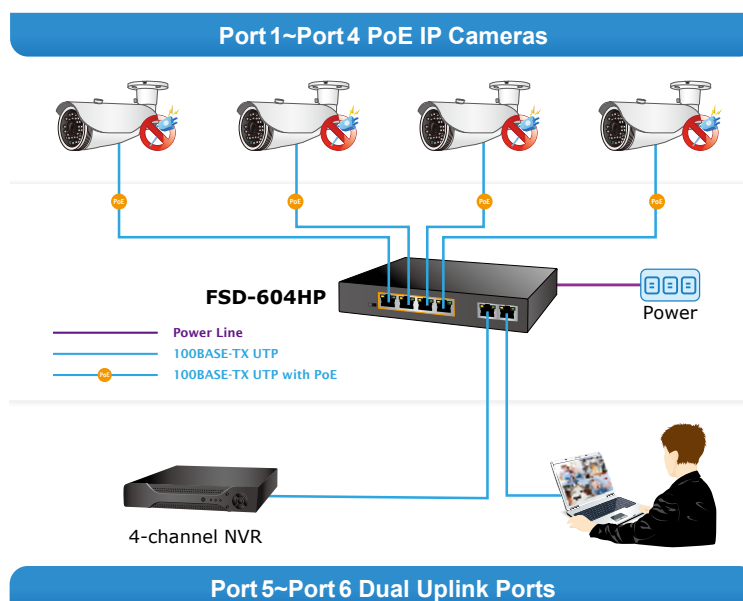

IP Office Department/Workgroup PoE Switch

With the business office expansion, the additional telephones required can be installed with less costs via the implementation of PoE IP telephony system than that of the traditional circuit wiring telephony system. The FSD-604HP 802.3at/af PoE Switch helps enterprises to create an integrated data, voice, and powered network. The IEEE 802.3af compliant IP phones can be installed without an additional power cable because the power can be provided via the standard Ethernet cable from the connected FSD-604HP.

The wireless AP group, PoE IP phones and analog telephony adapter work perfectly with the FSD-604HP, which injects power through the Ethernet cables. With the FSD-604HP, IP telephony deployment becomes more reliable and cost-effective, thus helping enterprises save tremendous costs when upgrading from the traditional telephony system to IP telephony communications infrastructure.

