



power contactor, AC-3e/AC-3, 80 A, 37 kW / 400 V, 3-pole, 230 V AC, 50 Hz,  
auxiliary contacts: 1 NO + 1 NC, screw terminal, size: S3

|                                                                                                              |                            |
|--------------------------------------------------------------------------------------------------------------|----------------------------|
| product brand name                                                                                           | SIRIUS                     |
| product designation                                                                                          | Power contactor            |
| product type designation                                                                                     | 3RT2                       |
| <b>General technical data</b>                                                                                |                            |
| size of contactor                                                                                            | S3                         |
| product extension                                                                                            |                            |
| • function module for communication                                                                          | No                         |
| • auxiliary switch                                                                                           | Yes                        |
| power loss [W] for rated value of the current                                                                |                            |
| • at AC in hot operating state                                                                               | 15.9 W                     |
| • at AC in hot operating state per pole                                                                      | 5.3 W                      |
| • without load current share typical                                                                         | 7.3 W                      |
| type of calculation of power loss depending on pole                                                          | quadratic                  |
| insulation voltage                                                                                           |                            |
| • of main circuit with degree of pollution 3 rated value                                                     | 1 000 V                    |
| • of auxiliary circuit with degree of pollution 3 rated value                                                | 690 V                      |
| surge voltage resistance                                                                                     |                            |
| • of main circuit rated value                                                                                | 8 kV                       |
| • of auxiliary circuit rated value                                                                           | 6 kV                       |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 690 V                      |
| shock resistance at rectangular impulse                                                                      |                            |
| • at AC                                                                                                      | 10.3g / 5 ms, 6.g / 10 ms  |
| shock resistance with sine pulse                                                                             |                            |
| • at AC                                                                                                      | 16.3g / 5 ms, 10.g / 10 ms |
| mechanical service life (operating cycles)                                                                   |                            |
| • of contactor typical                                                                                       | 10 000 000                 |
| • of the contactor with added electronically optimized auxiliary switch block typical                        | 5 000 000                  |
| • of the contactor with added auxiliary switch block typical                                                 | 10 000 000                 |
| reference code according to IEC 81346-2                                                                      | Q                          |
| Substance Prohibitance (Date)                                                                                | 03/01/2017                 |
| Weight                                                                                                       | 1.714 kg                   |
| <b>Ambient conditions</b>                                                                                    |                            |
| installation altitude at height above sea level maximum                                                      | 2 000 m                    |
| ambient temperature                                                                                          |                            |
| • during operation                                                                                           | -25 ... +60 °C             |
| • during storage                                                                                             | -55 ... +80 °C             |
| relative humidity minimum                                                                                    | 10 %                       |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum                                               | 95 %                       |

| Environmental footprint                                           |          |
|-------------------------------------------------------------------|----------|
| Environmental Product Declaration(EPD)                            | Yes      |
| global warming potential [CO2 eq] total                           | 405 kg   |
| global warming potential [CO2 eq] during manufacturing            | 7.66 kg  |
| global warming potential [CO2 eq] during operation                | 399 kg   |
| global warming potential [CO2 eq] after end of life               | -1.19 kg |
| Main circuit                                                      |          |
| number of poles for main current circuit                          | 3        |
| number of NO contacts for main contacts                           | 3        |
| number of NC contacts for main contacts                           | 0        |
| operating voltage                                                 |          |
| • at AC-3 rated value maximum                                     | 1 000 V  |
| • at AC-3e rated value maximum                                    | 1 000 V  |
| operational current                                               |          |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value       | 125 A    |
| • at AC-1                                                         |          |
| — up to 690 V at ambient temperature 40 °C rated value            | 125 A    |
| — up to 690 V at ambient temperature 60 °C rated value            | 105 A    |
| • at AC-3                                                         |          |
| — at 400 V rated value                                            | 80 A     |
| — at 500 V rated value                                            | 80 A     |
| — at 690 V rated value                                            | 58 A     |
| — at 1000 V rated value                                           | 30 A     |
| • at AC-3e                                                        |          |
| — at 400 V rated value                                            | 80 A     |
| — at 500 V rated value                                            | 80 A     |
| — at 690 V rated value                                            | 58 A     |
| — at 1000 V rated value                                           | 30 A     |
| • at AC-4 at 400 V rated value                                    | 66 A     |
| • at AC-5a up to 690 V rated value                                | 110 A    |
| • at AC-5b up to 400 V rated value                                | 80 A     |
| • at AC-6a                                                        |          |
| — up to 230 V for current peak value n=20 rated value             | 80 A     |
| — up to 400 V for current peak value n=20 rated value             | 80 A     |
| — up to 500 V for current peak value n=20 rated value             | 80 A     |
| — up to 690 V for current peak value n=20 rated value             | 58 A     |
| • at AC-6a                                                        |          |
| — up to 230 V for current peak value n=30 rated value             | 54 A     |
| — up to 400 V for current peak value n=30 rated value             | 54 A     |
| — up to 500 V for current peak value n=30 rated value             | 54 A     |
| — up to 690 V for current peak value n=30 rated value             | 54 A     |
| minimum cross-section in main circuit at maximum AC-1 rated value | 50 mm²   |
| operational current for approx. 200000 operating cycles at AC-4   |          |
| • at 400 V rated value                                            | 34 A     |
| • at 690 V rated value                                            | 24 A     |
| operational current                                               |          |
| • at 1 current path at DC-1                                       |          |
| — at 24 V rated value                                             | 100 A    |
| — at 60 V rated value                                             | 60 A     |
| — at 110 V rated value                                            | 9 A      |
| — at 220 V rated value                                            | 2 A      |
| — at 440 V rated value                                            | 0.6 A    |
| — at 600 V rated value                                            | 0.4 A    |
| • with 2 current paths in series at DC-1                          |          |
| — at 24 V rated value                                             | 100 A    |
| — at 60 V rated value                                             | 100 A    |
| — at 110 V rated value                                            | 100 A    |

|                                                                         |          |
|-------------------------------------------------------------------------|----------|
| — at 220 V rated value                                                  | 10 A     |
| — at 440 V rated value                                                  | 1.8 A    |
| — at 600 V rated value                                                  | 1 A      |
| ● with 3 current paths in series at DC-1                                |          |
| — at 24 V rated value                                                   | 100 A    |
| — at 60 V rated value                                                   | 100 A    |
| — at 110 V rated value                                                  | 100 A    |
| — at 220 V rated value                                                  | 80 A     |
| — at 440 V rated value                                                  | 4.5 A    |
| — at 600 V rated value                                                  | 2.6 A    |
| ● at 1 current path at DC-3 at DC-5                                     |          |
| — at 24 V rated value                                                   | 40 A     |
| — at 60 V rated value                                                   | 6 A      |
| — at 110 V rated value                                                  | 2.5 A    |
| — at 220 V rated value                                                  | 1 A      |
| — at 440 V rated value                                                  | 0.15 A   |
| — at 600 V rated value                                                  | 0.06 A   |
| ● with 2 current paths in series at DC-3 at DC-5                        |          |
| — at 24 V rated value                                                   | 100 A    |
| — at 60 V rated value                                                   | 100 A    |
| — at 110 V rated value                                                  | 100 A    |
| — at 220 V rated value                                                  | 7 A      |
| — at 440 V rated value                                                  | 0.42 A   |
| — at 600 V rated value                                                  | 0.16 A   |
| ● with 3 current paths in series at DC-3 at DC-5                        |          |
| — at 24 V rated value                                                   | 100 A    |
| — at 60 V rated value                                                   | 100 A    |
| — at 110 V rated value                                                  | 100 A    |
| — at 220 V rated value                                                  | 35 A     |
| — at 440 V rated value                                                  | 0.8 A    |
| — at 600 V rated value                                                  | 0.35 A   |
| <b>operating power</b>                                                  |          |
| ● at AC-2 at 400 V rated value                                          | 37 kW    |
| ● at AC-3                                                               |          |
| — at 230 V rated value                                                  | 22 kW    |
| — at 400 V rated value                                                  | 37 kW    |
| — at 500 V rated value                                                  | 45 kW    |
| — at 690 V rated value                                                  | 55 kW    |
| — at 1000 V rated value                                                 | 37 kW    |
| ● at AC-3e                                                              |          |
| — at 230 V rated value                                                  | 22 kW    |
| — at 400 V rated value                                                  | 37 kW    |
| — at 500 V rated value                                                  | 45 kW    |
| — at 690 V rated value                                                  | 55 kW    |
| — at 1000 V rated value                                                 | 37 kW    |
| <b>operating power for approx. 200000 operating cycles at AC-4</b>      |          |
| ● at 400 V rated value                                                  | 17.9 kW  |
| ● at 690 V rated value                                                  | 21.8 kW  |
| <b>operating apparent power at AC-6a</b>                                |          |
| ● up to 230 V for current peak value n=20 rated value                   | 31 kVA   |
| ● up to 400 V for current peak value n=20 rated value                   | 55 kVA   |
| ● up to 500 V for current peak value n=20 rated value                   | 69 kVA   |
| ● up to 690 V for current peak value n=20 rated value                   | 69 kVA   |
| <b>operating apparent power at AC-6a</b>                                |          |
| ● up to 230 V for current peak value n=30 rated value                   | 21.5 kVA |
| ● up to 400 V for current peak value n=30 rated value                   | 37.4 kVA |
| ● up to 500 V for current peak value n=30 rated value                   | 46.7 kVA |
| ● up to 690 V for current peak value n=30 rated value                   | 64.5 kVA |
| <b>short-time withstand current in cold operating state up to 40 °C</b> |          |

|                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• limited to 1 s switching at zero current maximum</li> <li>• limited to 5 s switching at zero current maximum</li> <li>• limited to 10 s switching at zero current maximum</li> <li>• limited to 30 s switching at zero current maximum</li> <li>• limited to 60 s switching at zero current maximum</li> </ul> | 1 500 A; Use minimum cross-section acc. to AC-1 rated value<br>1 186 A; Use minimum cross-section acc. to AC-1 rated value<br>851 A; Use minimum cross-section acc. to AC-1 rated value<br>538 A; Use minimum cross-section acc. to AC-1 rated value<br>423 A; Use minimum cross-section acc. to AC-1 rated value |
| <b>no-load switching frequency</b>                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                   |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>                                                                                                                                                                                                                                                                                               | 5 000 1/h                                                                                                                                                                                                                                                                                                         |
| <b>operating frequency</b>                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                   |
| <ul style="list-style-type: none"> <li>• at AC-1 maximum</li> </ul>                                                                                                                                                                                                                                                                                     | 900 1/h                                                                                                                                                                                                                                                                                                           |
| <ul style="list-style-type: none"> <li>• at AC-2 maximum</li> </ul>                                                                                                                                                                                                                                                                                     | 400 1/h                                                                                                                                                                                                                                                                                                           |
| <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> </ul>                                                                                                                                                                                                                                                                                     | 1 000 1/h                                                                                                                                                                                                                                                                                                         |
| <ul style="list-style-type: none"> <li>• at AC-3e</li> <li>— maximum</li> </ul>                                                                                                                                                                                                                                                                         | 1 000 1/h                                                                                                                                                                                                                                                                                                         |
| <ul style="list-style-type: none"> <li>• at AC-4 maximum</li> </ul>                                                                                                                                                                                                                                                                                     | 300 1/h                                                                                                                                                                                                                                                                                                           |
| <b>Control circuit/ Control</b>                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                   |
| <b>type of voltage of the control supply voltage</b>                                                                                                                                                                                                                                                                                                    | AC                                                                                                                                                                                                                                                                                                                |
| <b>control supply voltage at AC</b>                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                   |
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> </ul>                                                                                                                                                                                                                                                                                | 230 V                                                                                                                                                                                                                                                                                                             |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b>                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                                                                                                                                                                                                                                                                            | 0.8 ... 1.1                                                                                                                                                                                                                                                                                                       |
| <b>apparent pick-up power of magnet coil at AC</b>                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                                                                                                                                                                                                                                                                            | 296 VA                                                                                                                                                                                                                                                                                                            |
| <b>inductive power factor with closing power of the coil</b>                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                                                                                                                                                                                                                                                                            | 0.61                                                                                                                                                                                                                                                                                                              |
| <b>apparent holding power of magnet coil at AC</b>                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                                                                                                                                                                                                                                                                            | 19 VA                                                                                                                                                                                                                                                                                                             |
| <b>inductive power factor with the holding power of the coil</b>                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                   |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>                                                                                                                                                                                                                                                                                            | 0.38                                                                                                                                                                                                                                                                                                              |
| <b>closing delay</b>                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                   |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>                                                                                                                                                                                                                                                                                               | 13 ... 50 ms                                                                                                                                                                                                                                                                                                      |
| <b>opening delay</b>                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                   |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>                                                                                                                                                                                                                                                                                               | 10 ... 21 ms                                                                                                                                                                                                                                                                                                      |
| <b>arcing time</b>                                                                                                                                                                                                                                                                                                                                      | 10 ... 20 ms                                                                                                                                                                                                                                                                                                      |
| <b>control version of the switch operating mechanism</b>                                                                                                                                                                                                                                                                                                | Standard A1 - A2                                                                                                                                                                                                                                                                                                  |
| <b>Auxiliary circuit</b>                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                   |
| number of NC contacts for auxiliary contacts instantaneous contact                                                                                                                                                                                                                                                                                      | 1                                                                                                                                                                                                                                                                                                                 |
| number of NO contacts for auxiliary contacts instantaneous contact                                                                                                                                                                                                                                                                                      | 1                                                                                                                                                                                                                                                                                                                 |
| operational current at AC-12 maximum                                                                                                                                                                                                                                                                                                                    | 10 A                                                                                                                                                                                                                                                                                                              |
| <b>operational current at AC-15</b>                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                   |
| <ul style="list-style-type: none"> <li>• at 230 V rated value</li> </ul>                                                                                                                                                                                                                                                                                | 6 A                                                                                                                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> </ul>                                                                                                                                                                                                                                                                                | 3 A                                                                                                                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• at 500 V rated value</li> </ul>                                                                                                                                                                                                                                                                                | 2 A                                                                                                                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• at 690 V rated value</li> </ul>                                                                                                                                                                                                                                                                                | 1 A                                                                                                                                                                                                                                                                                                               |
| <b>operational current at DC-12</b>                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                   |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> </ul>                                                                                                                                                                                                                                                                                 | 10 A                                                                                                                                                                                                                                                                                                              |
| <ul style="list-style-type: none"> <li>• at 48 V rated value</li> </ul>                                                                                                                                                                                                                                                                                 | 6 A                                                                                                                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>                                                                                                                                                                                                                                                                                 | 6 A                                                                                                                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> </ul>                                                                                                                                                                                                                                                                                | 3 A                                                                                                                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• at 125 V rated value</li> </ul>                                                                                                                                                                                                                                                                                | 2 A                                                                                                                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> </ul>                                                                                                                                                                                                                                                                                | 1 A                                                                                                                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>                                                                                                                                                                                                                                                                                | 0.15 A                                                                                                                                                                                                                                                                                                            |
| <b>operational current at DC-13</b>                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                   |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> </ul>                                                                                                                                                                                                                                                                                 | 10 A                                                                                                                                                                                                                                                                                                              |
| <ul style="list-style-type: none"> <li>• at 48 V rated value</li> </ul>                                                                                                                                                                                                                                                                                 | 2 A                                                                                                                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>                                                                                                                                                                                                                                                                                 | 2 A                                                                                                                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> </ul>                                                                                                                                                                                                                                                                                | 1 A                                                                                                                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• at 125 V rated value</li> </ul>                                                                                                                                                                                                                                                                                | 0.9 A                                                                                                                                                                                                                                                                                                             |
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> </ul>                                                                                                                                                                                                                                                                                | 0.3 A                                                                                                                                                                                                                                                                                                             |

|                                                                                                           |                                                                                                                                      |
|-----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| • at 600 V rated value                                                                                    | 0.1 A                                                                                                                                |
| <b>contact reliability of auxiliary contacts</b>                                                          | 1 faulty switching per 100 million (17 V, 1 mA)                                                                                      |
| <b>UL/CSA ratings</b>                                                                                     |                                                                                                                                      |
| <b>full-load current (FLA) for 3-phase AC motor</b>                                                       |                                                                                                                                      |
| • at 480 V rated value                                                                                    | 77 A                                                                                                                                 |
| • at 600 V rated value                                                                                    | 62 A                                                                                                                                 |
| <b>yielded mechanical performance [hp]</b>                                                                |                                                                                                                                      |
| • for single-phase AC motor                                                                               |                                                                                                                                      |
| — at 110/120 V rated value                                                                                | 7.5 hp                                                                                                                               |
| — at 230 V rated value                                                                                    | 15 hp                                                                                                                                |
| • for 3-phase AC motor                                                                                    |                                                                                                                                      |
| — at 200/208 V rated value                                                                                | 25 hp                                                                                                                                |
| — at 220/230 V rated value                                                                                | 30 hp                                                                                                                                |
| — at 460/480 V rated value                                                                                | 60 hp                                                                                                                                |
| — at 575/600 V rated value                                                                                | 60 hp                                                                                                                                |
| <b>contact rating of auxiliary contacts according to UL</b>                                               | A600 / P600                                                                                                                          |
| <b>Short-circuit protection</b>                                                                           |                                                                                                                                      |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V | C characteristic: 10 A; 0.4 kA                                                                                                       |
| <b>design of the fuse link</b>                                                                            |                                                                                                                                      |
| • for short-circuit protection of the main circuit                                                        |                                                                                                                                      |
| — with type of coordination 1 required                                                                    | gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)                                                     |
| — with type of coordination 2 required                                                                    | gG: 160 A (690 V, 100 kA), aM: 80 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)                                                      |
| • for short-circuit protection of the auxiliary switch required                                           | gG: 10 A (500 V, 1 kA)                                                                                                               |
| <b>Installation/ mounting/ dimensions</b>                                                                 |                                                                                                                                      |
| <b>mounting position</b>                                                                                  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| fastening method side-by-side mounting                                                                    | Yes                                                                                                                                  |
| <b>fastening method</b>                                                                                   | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715                                                             |
| <b>height</b>                                                                                             | 140 mm                                                                                                                               |
| <b>width</b>                                                                                              | 70 mm                                                                                                                                |
| <b>depth</b>                                                                                              | 152 mm                                                                                                                               |
| <b>required spacing</b>                                                                                   |                                                                                                                                      |
| • with side-by-side mounting                                                                              |                                                                                                                                      |
| — forwards                                                                                                | 20 mm                                                                                                                                |
| — upwards                                                                                                 | 10 mm                                                                                                                                |
| — downwards                                                                                               | 10 mm                                                                                                                                |
| — at the side                                                                                             | 0 mm                                                                                                                                 |
| • for grounded parts                                                                                      |                                                                                                                                      |
| — forwards                                                                                                | 20 mm                                                                                                                                |
| — upwards                                                                                                 | 10 mm                                                                                                                                |
| — at the side                                                                                             | 10 mm                                                                                                                                |
| — downwards                                                                                               | 10 mm                                                                                                                                |
| • for live parts                                                                                          |                                                                                                                                      |
| — forwards                                                                                                | 20 mm                                                                                                                                |
| — upwards                                                                                                 | 10 mm                                                                                                                                |
| — downwards                                                                                               | 10 mm                                                                                                                                |
| — at the side                                                                                             | 10 mm                                                                                                                                |
| <b>Connections/ Terminals</b>                                                                             |                                                                                                                                      |
| <b>type of electrical connection</b>                                                                      |                                                                                                                                      |
| • for main current circuit                                                                                | screw-type terminals                                                                                                                 |
| • for auxiliary and control circuit                                                                       | screw-type terminals                                                                                                                 |
| • at contactor for auxiliary contacts                                                                     | Screw-type terminals                                                                                                                 |
| • of magnet coil                                                                                          | Screw-type terminals                                                                                                                 |
| <b>type of connectable conductor cross-sections</b>                                                       |                                                                                                                                      |
| • for main contacts                                                                                       |                                                                                                                                      |
| — finely stranded with core end processing                                                                | 2x (2.5 ... 35 mm²), 1x (2.5 ... 50 mm²)                                                                                             |
| • for AWG cables for main contacts                                                                        | 2x (10 ... 1/0), 1x (10 ... 2/0)                                                                                                     |
| <b>connectable conductor cross-section for main contacts</b>                                              |                                                                                                                                      |
| • solid                                                                                                   | 2.5 ... 16 mm²                                                                                                                       |

|                                                                                           |                                                                       |
|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| • stranded                                                                                | 6 ... 70 mm <sup>2</sup>                                              |
| • finely stranded with core end processing                                                | 2.5 ... 50 mm <sup>2</sup>                                            |
| <b>connectable conductor cross-section for auxiliary contacts</b>                         |                                                                       |
| • solid or stranded                                                                       | 0.5 ... 2.5 mm <sup>2</sup>                                           |
| • finely stranded with core end processing                                                | 0.5 ... 2.5 mm <sup>2</sup>                                           |
| <b>type of connectable conductor cross-sections</b>                                       |                                                                       |
| • for auxiliary contacts                                                                  |                                                                       |
| — solid or stranded                                                                       | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ) |
| — finely stranded with core end processing                                                | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ) |
| • for AWG cables for auxiliary contacts                                                   | 2x (20 ... 16), 2x (18 ... 14)                                        |
| <b>AWG number extended as coded connectable conductor cross section for main contacts</b> | 10 ... 2/0                                                            |
| <b>AWG number as coded connectable conductor cross section for auxiliary contacts</b>     | 20 ... 14                                                             |

#### Safety related data

|                                                                      |           |
|----------------------------------------------------------------------|-----------|
| <b>product function</b>                                              |           |
| • mirror contact according to IEC 60947-4-1                          | Yes       |
| • positively driven operation according to IEC 60947-5-1             | No        |
| • suitable for safety function                                       | Yes       |
| suitability for use safety-related switching OFF                     | Yes       |
| <b>service life maximum</b>                                          | 20 a      |
| <b>test wear-related service life necessary</b>                      | Yes       |
| <b>proportion of dangerous failures</b>                              |           |
| • with low demand rate according to SN 31920                         | 40 %      |
| • with high demand rate according to SN 31920                        | 73 %      |
| <b>B10 value with high demand rate according to SN 31920</b>         | 1 000 000 |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b> | 100 FIT   |

#### ISO 13849

|                                                            |     |
|------------------------------------------------------------|-----|
| <b>device type according to ISO 13849-1</b>                | 3   |
| <b>overdimensioning according to ISO 13849-2 necessary</b> | Yes |

#### IEC 61508

|                                                    |        |
|----------------------------------------------------|--------|
| <b>safety device type according to IEC 61508-2</b> | Type A |
|----------------------------------------------------|--------|

#### Electrical Safety

|                                                                |                                                  |
|----------------------------------------------------------------|--------------------------------------------------|
| <b>protection class IP on the front according to IEC 60529</b> | IP20                                             |
| <b>touch protection on the front according to IEC 60529</b>    | finger-safe, for vertical contact from the front |

#### Approvals Certificates

##### General Product Approval



[KC](#)



|     |                   |                      |
|-----|-------------------|----------------------|
| EMV | Test Certificates | Maritime application |
|-----|-------------------|----------------------|



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



|                      |       |         |                 |
|----------------------|-------|---------|-----------------|
| Maritime application | other | Railway | Dangerous goods |
|----------------------|-------|---------|-----------------|



[Confirmation](#)



[Special Test Certificate](#)

[Transport Information](#)

#### Environment



#### Further information

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information for data generation and storage**

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2045-1AP00>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2045-1AP00>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-1AP00>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**




[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2045-1AP00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2045-1AP00&lang=en)


**Characteristic: Tripping characteristics,  $I^2t$ , Let-through current**

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-1AP00/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2045-1AP00&objecttype=14&gridview=view1>

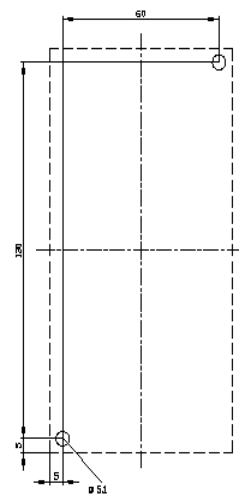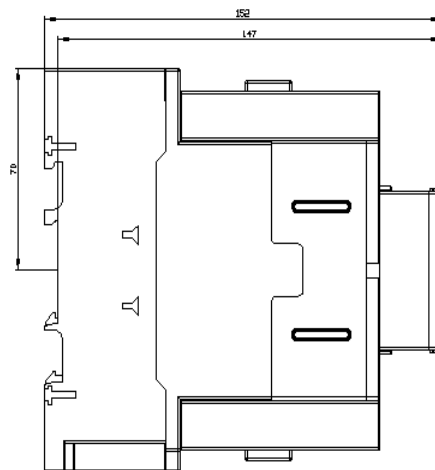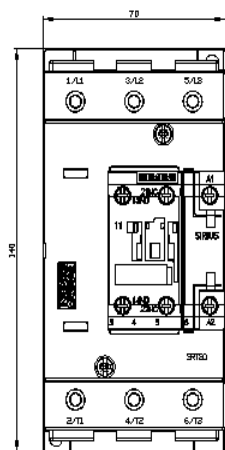

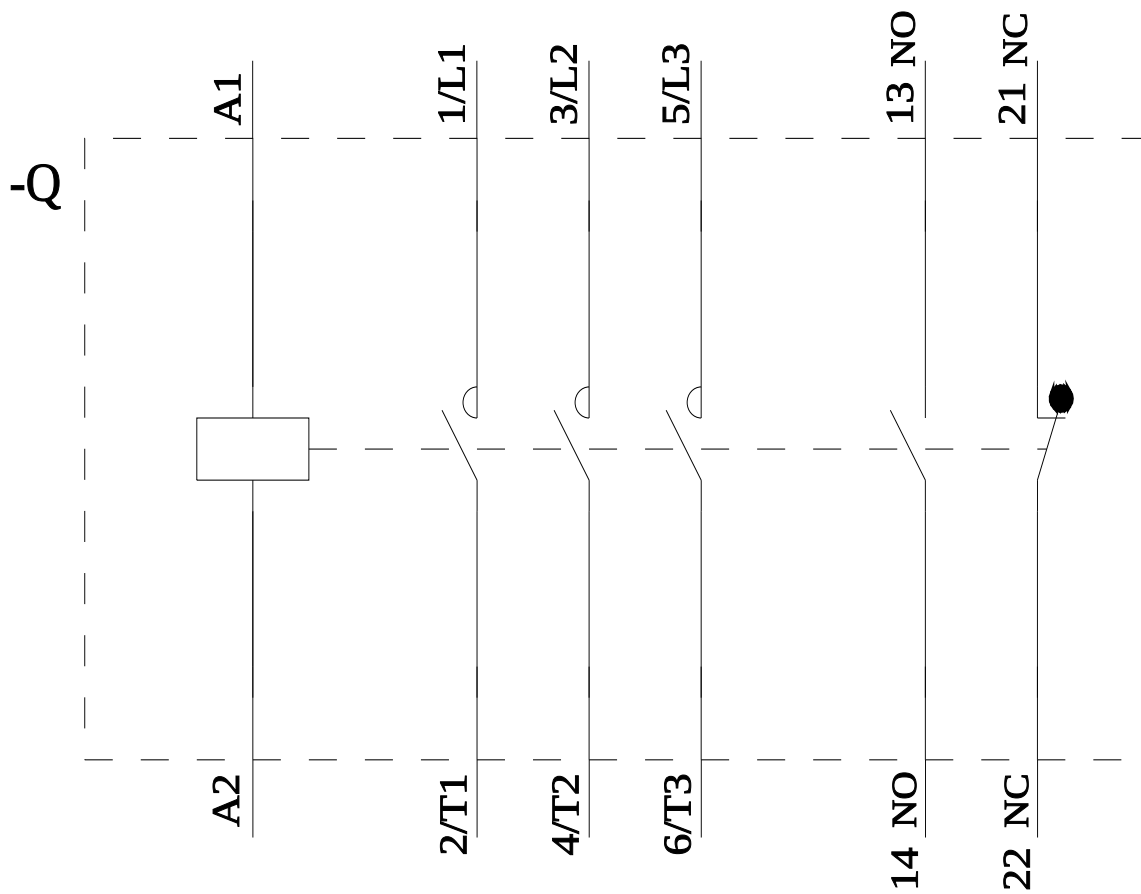

last modified:

10/21/2025 